


## Self-Storing Storm Insert Removal Process



1a

1. To remove the interior "moving" glass panel, you need to raise it up past the grey plastic piece that holds it in place. You can pull the bottom of the storm panel toward you.

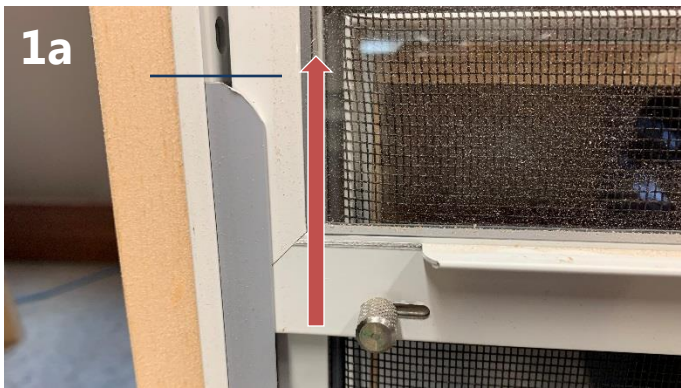

1b

As you are removing the moving storm panel, you have to bring the top straight down to the horseshoe opening cut in the metal (due to the top grey plastic nubs located at the top of the panel that moves).



1c


2. The next step is to remove the top "fixed" storm insert. To do this, you will need to lift the panel above its grey insert shelf and pull the bottom toward you (the top will be to the interior of the top metal piece that holds it in place).



2a



2b

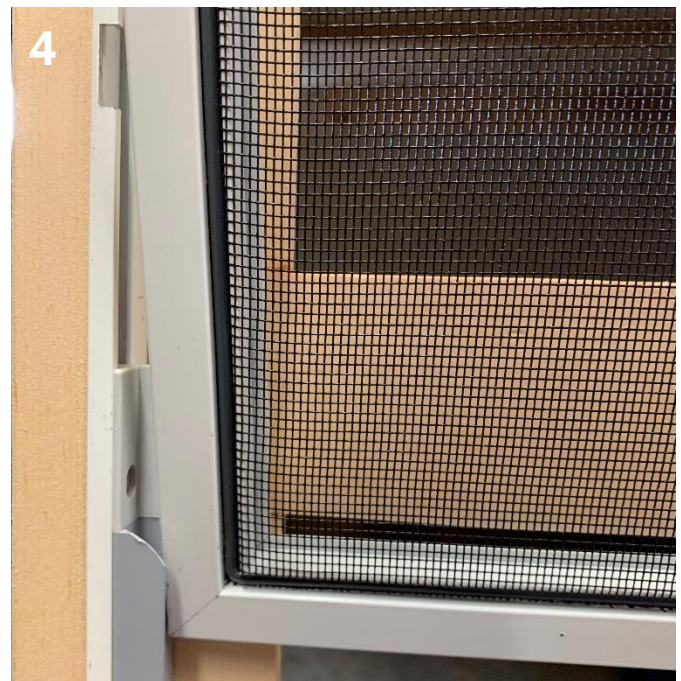

4

3. The final step is removing the bottom screen panel, which can be accomplished by lifting the panel up toward the top and toward you, knowing you have to clear the grey plastic piece to remove the panel.

4. In order to put everything back together, you simply reverse the process.